




INTEK™ 11.5 Gross HP 344 CC

Bore 3.44 in. (87.3 mm)
Stroke 2.26 in. (57.5 mm)
Oil Capacity 48 fl. oz. (1.4 L)



Features:

- Dura-Bore™ cast iron cylinder sleeve for extended life
- Float carburetor for consistent easy starting
- Maintenance-free Magnetron® electronic ignition for quick, dependable starts
- Dual-Clean™ air cleaner pleated paper filter with a foam pre-cleaner ensures maximum protection for extended engine life
- Overhead valve design (OHV) for cooler operation and longer valve life
- Patented linear balancing system provides smoother performance
- Buyer protection package provides two-year consumer engine warranty

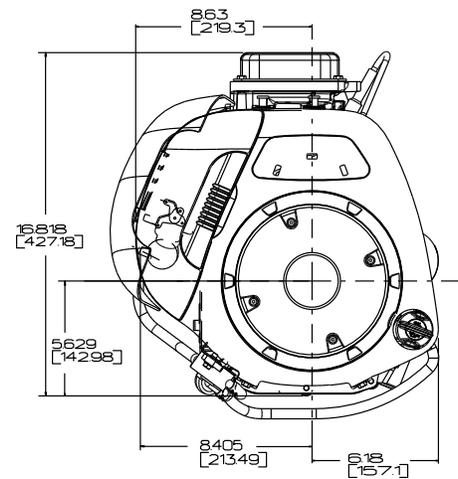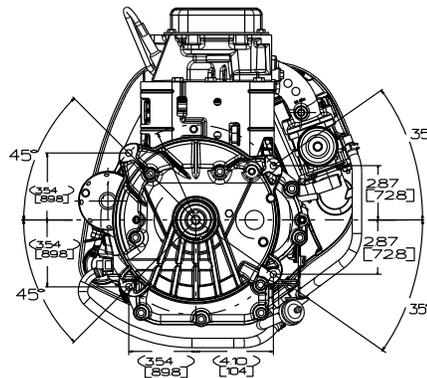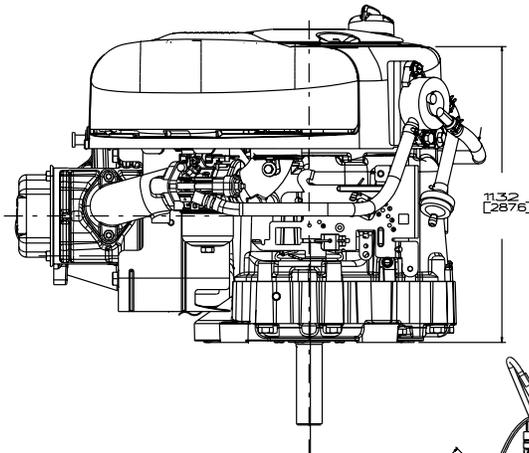

For Fuel Tank Dimensions, see page 54

| Model Type | Shipping Weight | Crankshaft | Crankshaft (P.T.O.) Extension | Dimension | Starter Position Bolt-On/Changeable | Ext. Oil Fill & Dipstick | Governor | Controls | Pulse Fuel Pump | Remote Choke | Choke-A-Matic® | Ground Wire Terminal | Fuel Tank (Quarts) | Top Governor Speed | Notes |
|---------------|-----------------|------------|---------------------------------|-----------|-------------------------------------|--------------------------|----------|----------|-----------------|--------------|----------------|----------------------|--------------------|--------------------|-------|
| 217902 | | | | | | | | | | | | | | | |
| 0015 | 72 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | 9 | X | M | R | | | X | X | ■ | 3400 | |
| 0016 | 69 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | 9 | X | M | R | | X | X | X | ■ | 3400 | |
| 0020 | 72 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | 9 | X | M | R | X | | X | X | 3 | 3400 | |
| 217907 | | | | | | | | | | | | | | | |
| 0019 | 77 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | 9 | X | M | R | | | X | X | ■ | 3600 | ▼ |
| 0025 | 77 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | | X | M | R | | | X | X | ■ | 3600 | ▼ |
| 0028 | 77 | 697390 | Tapped 7/16-20, Keyway, 1" dia. | 3-5/32(b) | | X | M | R | X | | X | X | 3 | 3600 | ▼ |

■ Fuel tank omitted. ▼ Engine equipped with 12 Volt Gear Drive Starter and Dual Circuit Alternator. (3 Amp DC - 14 Volts AC)