

## Professional Series™ 23.0 Gross HP

724 CC

Bore 3.12 in. (79.2 mm) Stroke 2.89 in. (73.4 mm) Oil Capacity 64 fl. oz. (1.9 L)



5.918"

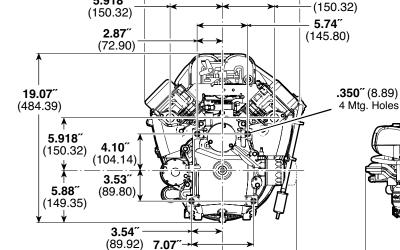

(179.58)

(457.71)

7.84"

(199.14)

Minimum distance required

for oil filter removal.

## **Features:**

- Dura-Bore<sup>™</sup> cast iron cylinder sleeve for extended life
- Dependable float feed type carburetor with integral fuel pump for remote mount fuel tank
- Maintenance-free Magnetron® electronic ignition for quick, dependable starts
- Mechanical compression release for smooth, quick starting
- Advanced Debris Management System with a dual seal, catridge-style air filter provides maximum protection and extends engine life
- Full pressure lubrication with spin-on oil filter assures controlled lubrication for extended component life
- Overhead valve design (OHV) for cooler operation and longer valve life
- · Platinum spark plugs for extended life
- Premium oil filter
- Buyer protection package provides two-year consumer engine warranty


14.32"

(363.73)

13.13"

(333.50)

Top of Trim Ring

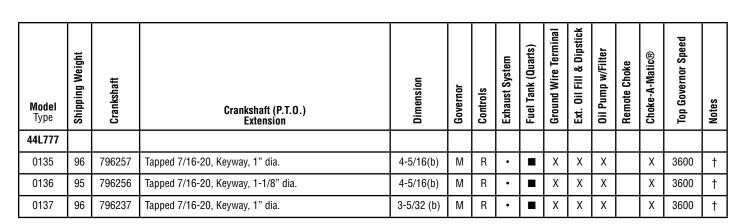

13.18"

(334.77)

5.918"

<sup>•</sup> Exhaust manifold and muffler omitted. ■ Fuel tank omitted. † Engine equipped with 12 Volt Gear Drive Starter and 16 Amp DC Alternator.